

University of Arkansas, Fayetteville

ScholarWorks@UARK

Biological and Agricultural Engineering
Undergraduate Honors Theses

Biological and Agricultural Engineering

5-2020

Reducing Dissolved Phosphorus in Stream Water May Not Influence Estimation of Sediment Equilibrium Phosphorus Concentrations

Eleanor Henson

University of Arkansas, Fayetteville

Follow this and additional works at: <https://scholarworks.uark.edu/baeguht>



Part of the [Bioresource and Agricultural Engineering Commons](#)

Citation

Henson, E. (2020). Reducing Dissolved Phosphorus in Stream Water May Not Influence Estimation of Sediment Equilibrium Phosphorus Concentrations. *Biological and Agricultural Engineering Undergraduate Honors Theses* Retrieved from <https://scholarworks.uark.edu/baeguht/75>

This Thesis is brought to you for free and open access by the Biological and Agricultural Engineering at ScholarWorks@UARK. It has been accepted for inclusion in Biological and Agricultural Engineering Undergraduate Honors Theses by an authorized administrator of ScholarWorks@UARK. For more information, please contact scholar@uark.edu, uarepos@uark.edu.

**Reducing Dissolved Phosphorus in Stream Water May Not Influence Estimations
of Sediment Equilibrium Phosphorus Concentrations**

Eleanor Henson

Biological Engineering Program

Biological and Agricultural Engineering Department

College of Engineering

University of Arkansas

Undergraduate Honors Thesis

Abstract

The potential for stream sediments to adsorb or release phosphorus (P) depends on the equilibrium P concentration (EPC), which is the water column P concentration where P is neither (net) adsorbed nor released from the sediments. Current methods of measuring EPC in streams include adding known P concentrations to stream water, mixing with fresh sediments, and allowing the mixture to reach equilibrium through P sorption. Sediment EPC is usually calculated as the x-intercept of the linear relationship between initial P concentrations and P absorbed by the sediments. However, the x-intercept is often an extrapolation past the known data set (i.e. no desorption of P from the sediments is simulated). The purpose of this study was to use aluminum sulfate (alum) to decrease ambient P concentrations and encourage P desorption from the sediments; then to compare EPC estimations with and without the use of alum treatments. The results from this study found optimal alum dosages to be between 5 and 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ to provide a range of P removal for the EPC experiments. Above 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$, stream water pH began to decrease. The other notable changes to water chemistry after alum treatments were increases in sulfate and residual concentrations of aluminum. However, EPC estimations were not significantly different between traditional calculation methods and the use of P desorption data points. These results suggest current methods for EPC estimations are acceptable, and spending time and money to promote desorption of P from the sediments is not necessary.

Introduction

Phosphorus (P) enrichment in streams and rivers often leads to excessive algal growth and accelerated eutrophication. In addition to P inputs from the landscape, in-stream P behavior must be considered in order to apply effective management strategies (McDowell and Sharpley, 2003). Benthic sediments can absorb or release P through physiochemical processes (e.g. sorption and desorption with Al and Fe hydroxides or co-precipitation with Ca) and biological processes (e.g. assimilation by bacteria, aquatic plants, and benthic algae) (Withers & Jarvie, 2008). These in-stream processes can modify edge-of-field P losses and P loads and forms transported downstream (Mulholland and Webster, 2010).

In theory, the potential for sediments to absorb or release P depends on the equilibrium P concentration (EPC), which is the water column P concentration where P is neither sorbed nor released from the sediments (Froelich, 1988). This potential for sediments to either buffer or increase external P loads is increasingly important for watershed modeling and total maximum daily load development (White et al., 2014; Mittelstet et al. 2017). For the Soil and Water Assessment Tool (SWAT), a widely used model for predicting hydrology, water quality and management impacts (Gassman et al., 2007), an in-stream P cycling model has been developed and tested to include the EPC concept (White et al., 2014). However, to calibrate and validate EPC model estimates, EPC must be experimentally measured using stream sediment and water samples.

Current methods of measuring EPC in streams include adding known P concentrations to stream water (or other aqueous solutions), mixing with fresh sediments, and allowing the sediments and water to reach equilibrium through P sorption (Klotz 1985; Taylor and Kunishi 1971). Sediment EPC is determined by relating initial P concentration in aqueous solution to that adsorbed by the sediments (Haggard et al., 2007). Through linear regression, the EPC is estimated as the x-intercept. However, if stream water is the aqueous solution, then often the ambient P concentration in the stream water limits desorption, and no data points are available below the x-axis (i.e., desorption). Therefore, the x-

intercept is an extrapolation past the known dataset. The ambient P concentration in stream water needs to be decreased to allow for P desorption from the sediments.

A common technique for removing P from the water involves the use of binding metal oxides, a widely used practice in reservoirs for nearly half a century (Landner, 1970). Aluminum sulfate (alum) is an option for controlling sediment P release (Erickson et al., 2004) because Al is not redox sensitive, unlike Fe (Huser et al., 2011). However, variability in the dosing rates and longevity of alum treatments has led to more research on the effects of water chemistry (Huser et al., 2011). The purpose of this study is to evaluate the use of alum to reduce ambient P concentrations in stream water and encourage sediment desorption in EPC experiments, specifically to 1) determine optimal alum dosage rates for P removal, 2) evaluate the influence of alum treatments on the water chemistry, and 3) compare EPC estimations using traditional methods to the inclusion of alum treatments of four streams in Arkansas. This study evaluates the hypothesis that the addition of alum in EPC experiments has the potential to alter current estimations.

Methods

Study Sites

Water samples were collected from four streams: Spring Creek, Cherokee Creek, Prairie Creek, and Poteau River in Arkansas for use in determining appropriate alum dosages and the impacts of alum on water chemistry (further referred to as the alum treatment experiment). The four sites were selected to cover a range of ambient P concentrations (0.004-0.2 mg L⁻¹), land use, and sediment characteristics.

Spring Creek lies within the 1953 km² Illinois River Watershed in northwest Arkansas (U.S. Geological Survey, 2011). This watershed is part of the Ozark highland ecoregion, which is largely underlain with limestone, and streams typically have gravel-like substrate. Land use within the Spring

Creek watershed is 44% urban, 43% pasture, and 12% forest (U.S. Geological Survey, 2011) and the stream receives effluent from the wastewater treatment plant (WWTP) in Springdale, Arkansas.

Cherokee Creek, Prairie Creek, and the Poteau River fall within the 4,892 km² Upper Poteau River Watershed, which is one of the top ten priority watersheds in Arkansas due to excess loading of P (ANRC, 2018). The sampling location on the Poteau River is approximately 12 km downstream of the Waldron WWTP. The Poteau River drainage area is dominantly forest (~68%) and partly pasture (~17%), and lies within the Ouachita Mountain ecoregion, which is dominantly underlain by shale and sandstone, and stream substrates are often comprised of gravel, cobbles, or bedrock (Woods et al., 2004). Cherokee Creek drainage area has approximately even amounts of forest and pasture land cover (~40% each), and lies within the Arkansas Valley (the alluvial valley between the Ouachitas and Ozarks) ecoregion, which is mostly underlain by sandstone, shale, and siltstone. Prairie Creek is also within the Arkansas Valley and has a drainage area that is mostly pasture (61%) and partly forest (~23%). All three sites in the Poteau River Watershed had small fractions of urban land use (~5%).

For EPC calculations, sediment and water samples were collected from the Poteau River, Prairie Creek, and three different locations on Spring Creek: one upstream, one approximately 1.00 km downstream, and one approximately 8.75 km downstream from the Springdale WWTP. These sites were selected to maintain a range in ambient P concentrations, while also taking into account the accessibility of collecting sediment samples.

Table 1- Average nutrient concentrations and sediment properties of the EPC experiment sites. LOI accounts for the organic matter lost on ignition.

<i>Site</i>	<i>Collection Date</i>	<i>Average Nutrient Concentrations (mg L⁻¹)</i>					<i>Sediment Properties (%)</i>				
		<i>SRP</i>	<i>TP</i>	<i>TN</i>	<i>NO₃</i>	<i>N+N</i>	<i>Conductivity (μS/cm)</i>	<i>Sand</i>	<i>Silt</i>	<i>Clay</i>	<i>LOI</i>
Spring Creek Upstream	7/5/18	0.00	0.02	1.69	1.40	1.44	412	86.2	2.5	11.3	2.4
Spring Creek 1 km Downstream	7/5/18	0.09	0.11	2.78	1.97	2.07	644	88.6	4.6	6.7	2.5
Spring Creek 8.75 km Downstream	6/13/18	0.11	0.12	3.77	3.11	3.55	599	76.5	12.9	10.6	1.1
Poteau River	6/21/18	0.22	0.28	5.97	4.99	5.50	849	29.8	41.8	28.4	2.6
Prairie Creek	6/21/18	0.04	0.07	1.16	0.57	0.64	149	39.1	24.2	36.7	2.9

Alum Treatment Experiment

Water was collected in 10 L carboys on May 29th, 2018, from the thalweg of each of the four streams and placed on ice until returning to the lab. Within 24 hours, approximately 50 mL of water was filtered through 0.45 μm membrane filters, and the filtrate was analyzed for pH and soluble reactive P (SRP) using the automated ascorbic acid method (APHA, 1998) on a Skalar San Plus Wet Chemistry Autoanalyzer (Skalar, the Netherlands).

Filtered stream water (50 mL) was dosed with alum at treatment rates of 0, 0.1, 0.25, 0.5, 1, 5, 10, 25, 50, 100, and 150 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$. Samples were shaken for 1 hr, centrifuged for approximately 20 min, and the supernatant was separated into 20 mL vials to be analyzed for pH, SRP, $\text{NO}_3\text{-N}$, $\text{NH}_4\text{-N}$, trace metals, and anions (SO_4 , Cl) at a water quality lab certified by the Arkansas Department of Environmental Quality (<https://arkansas-water-center.uark.edu/water-quality-lab/Statement-of-Qualifications.pdf>). Results from this experiment were used to determine optimal alum dosages for SRP removal and to analyze impacts of alum on water chemistry. Analysis of variance (ANOVA) with means separation (Least Significant Difference, LSD) was used to determine whether water chemistry was different between treatments ($\alpha=0.05$).

Equilibrium Phosphorus Concentration

Water and composite sediment samples were collected at 3 transects perpendicular to flow at each site of interest. Approximately 500 g of sediment was collected across each transect from the top 5 to 10 cm and sieved at 3.75 mm on-site. Upon returning to the lab, 25 g of fresh wet sediment were placed in Erlenmeyer flasks. 100 mL of filtered (0.45 μm) stream water were spiked with P at rates of 0.00, 0.10, 0.25, 0.50, 1.00, and 2.50 mg L^{-1} . Additional stream water was treated with alum to remove approximately 25%, 50%, and 100% of initial P concentrations. For example, if the stream water had an ambient P concentration of 0.1 mg L^{-1} , then the initial P concentrations of the treatments were 0.10,

0.20, 0.35, 0.60, 1.10, 2.60 mg L⁻¹ with spiked P, and approximately 0.00, 0.50, and 0.75 mg L⁻¹ SRP with alum reduced P. This range of treatments allowed for P adsorption and desorption processes between the water and sediments.

The sediment and stream water slurry was shaken for 1 hr and allowed to settle for approximately 30 min. The supernatant was collected, filtered, and analyzed for SRP. The remaining sediment slurry was placed in an oven at 80°C for 48 hrs to determine dry mass. The amount of P sorbed or released per dry weight sediment (mg P kg⁻¹ dry sediment) was regressed against initial P concentration of the treatment solutions. EPC was estimated as the x-intercept of the linear portion of the adsorption and desorption values. Paired t-tests were used to determine if the inclusion of the alum treatments to reduce ambient P influenced EPC estimation.

Results

Alum Treatment Experiment

An alum treatment concentration of 10 mg-Al₂(SO₄)₃ L⁻¹ removed ~60-70% SRP in the stream water from Prairie Creek, Cherokee Creek, and Spring Creek, with ambient SRP concentrations of 0.02, 0.09, 0.15 mg L⁻¹, respectively (Figure 1). An alum treatment concentration of 25 mg-Al₂(SO₄)₃ L⁻¹ removed almost 100% SRP from the stream water from these sites. For samples from the Poteau River, an alum treatment concentration of 25 mg-Al₂(SO₄)₃ L⁻¹ removed ~77% of SRP from the stream water (ambient concentration of 0.21 mg L⁻¹), and an alum concentration between 25-50 mg-Al₂(SO₄)₃ L⁻¹ removed 100% SRP.

Average pH decreased with increasing alum dosage across each site, especially when concentrations were greater than 25 mg-Al₂(SO₄)₃ L⁻¹ (Figure 1). Alum dosage concentrations of 0, 5, 10, and 25 mg-Al₂(SO₄)₃ L⁻¹ caused very little deviation from neutral pH conditions. The largest change occurred in stream water from Prairie Creek, where ambient pH (7.8) decreased to 7.0 with a 25 mg-

$\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ (Figure 1), possibly due to low ambient SRP (0.02 mg L^{-1}). Most trace metals were unaffected by alum treatments across sites, except Al, Fe, and Zn. Al concentrations peaked around alum dosages of 5-10 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ across each site. The Poteau River had the highest peak in Al (0.80 mg L^{-1}) with an alum dosage of 10 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$, which decreased back to 0.53 mg L^{-1} with an alum dosage of 25 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$. The remaining sites showed very low Al concentrations with an alum treatment concentration of 25 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$. Fe concentrations were significantly different between alum treatments at Poteau River, Cherokee Creek, and Prairie Creek ($p < 0.05$), and generally, concentrations decreased with increasing alum concentration. Zn concentrations were significantly different between alum treatments at Cherokee Creek and Prairie Creek ($p < 0.05$), and similar to Fe, concentrations of Zn generally decreased with increasing alum concentration. Anion (F, Cl, and $\text{NO}_3\text{-N}$) concentrations were not different across alum treatments ($p > 0.05$). As expected, sulfate (SO_4) concentrations increased with increasing alum treatment concentrations (approximately 10-15 mg L^{-1} increase in SO_4 with increasing alum from 0-25 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$). To obtain an optimal range of P removal that didn't impact stream water chemistry, alum dosages were determined to be 5, 10, and 25 $\text{mg-Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ for use in EPC estimations.

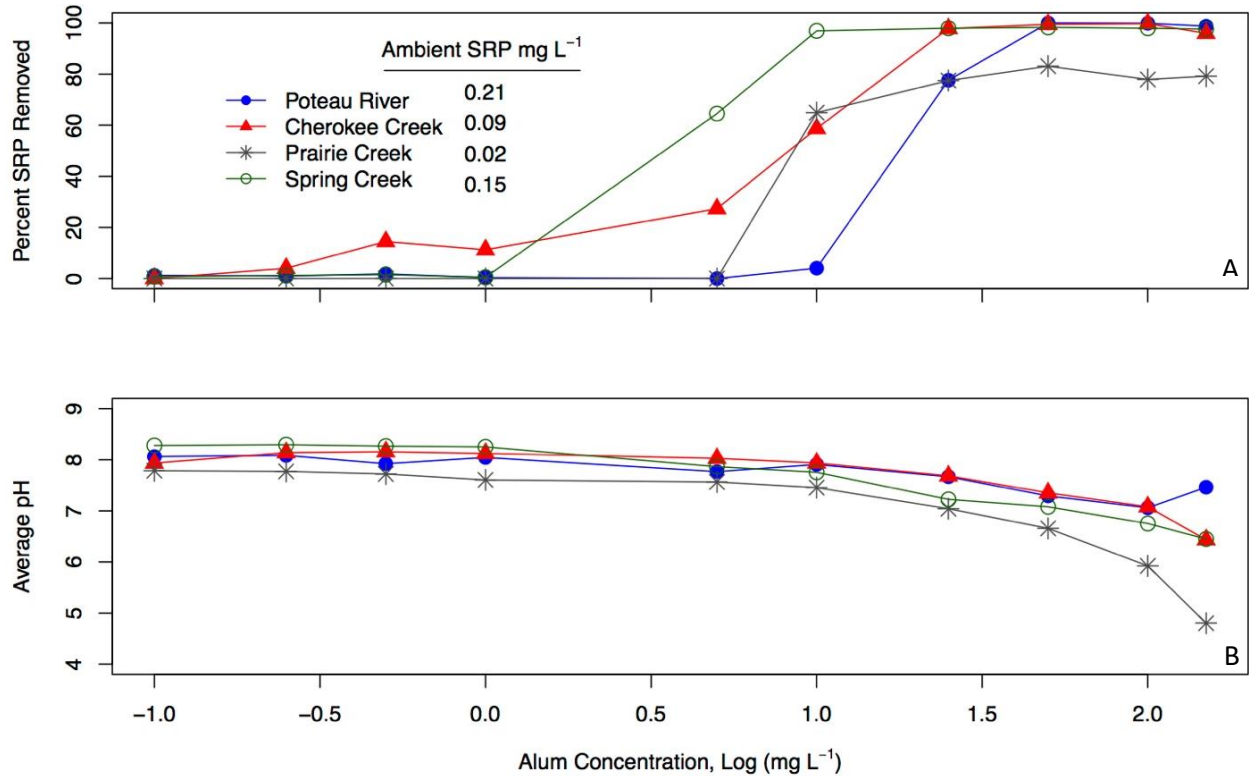


Figure 1-Percent SRP removed and ambient SRP concentrations for Poteau River, Cherokee Creek, Prairie Creek, and Spring Creek in Arkansas (A). Decrease in average pH relative to alum treatment concentrations (mg L⁻¹) for Poteau River, Cherokee Creek, Prairie Creek, and Spring Creek in Arkansas (B).

Equilibrium Phosphorus Concentration Estimations

For all 5 sites, the amount of P sorbed regressed against initial P concentrations was significantly linear with and without the inclusion of alum treatments ($R^2 > 0.85$ and $p < 0.05$, Table 2). The 3 sites on Spring Creek showed slightly higher linear correlations ($R^2 = 0.98$, $p < 0.01$) compared to the Poteau River and Prairie Creek. No significant difference was found between the two EPC estimation methods (i.e. with or without the use of alum treatments) for any site ($p > 0.05$, Figure 2). Prairie Creek had the greatest EPC estimations with and without alum treatments (0.204 mg L^{-1} and 0.210 mg L^{-1} , respectively), but had the lowest ambient P concentration (0.02 mg L^{-1}). The Poteau River had the largest difference in EPC estimations from 0.195 mg L^{-1} with alum treatments and 0.104 mg L^{-1} without,

but the difference was not significant ($p=0.12$). Both the ambient P concentrations and standard errors were the greatest at this site as well. Upstream Spring Creek had the lowest EPC estimations with and without alum treatment (both approximately 0.016 mg L^{-1}).

Table 2- Regression analysis for all sites between the two EPC calculation methods, with and without alum treatment. The letter n denotes the number of samples acquired. The slope is shown as a range of the three replicates and the units are reported in L kg^{-1} dry sediment.

<i>Site</i>	<i>With Alum</i>				<i>Without Alum</i>			
	<i>n</i>	<i>R</i> ²	<i>slope</i>	<i>p-value</i>	<i>n</i>	<i>R</i> ²	<i>slope</i>	<i>p-value</i>
Spring Creek Upstream	5	0.99- 0.99	3.50- 4.57	<0.01	4	0.98- 0.99	2.70-4.49	≤ 0.01
Spring Creek 1 km Downstream	7	0.99- 0.99	2.73- 2.81	<0.01	4	0.99- 0.99	2.74-2.88	≤ 0.01
Spring Creek 8.75 km Downstream	7	0.99- 0.99	3.65- 4.90	<0.01	4	0.99- 0.99	3.66-4.95	≤ 0.01
Poteau River	7-8	0.85- 0.88	3.43- 5.72	<0.01	4-5	0.87- 0.99	3.16-5.13	≤ 0.02
Prairie Creek	7	0.85- 0.99	2.15- 2.54	<0.01	5	0.86- 0.99	2.10-2.78	≤ 0.02

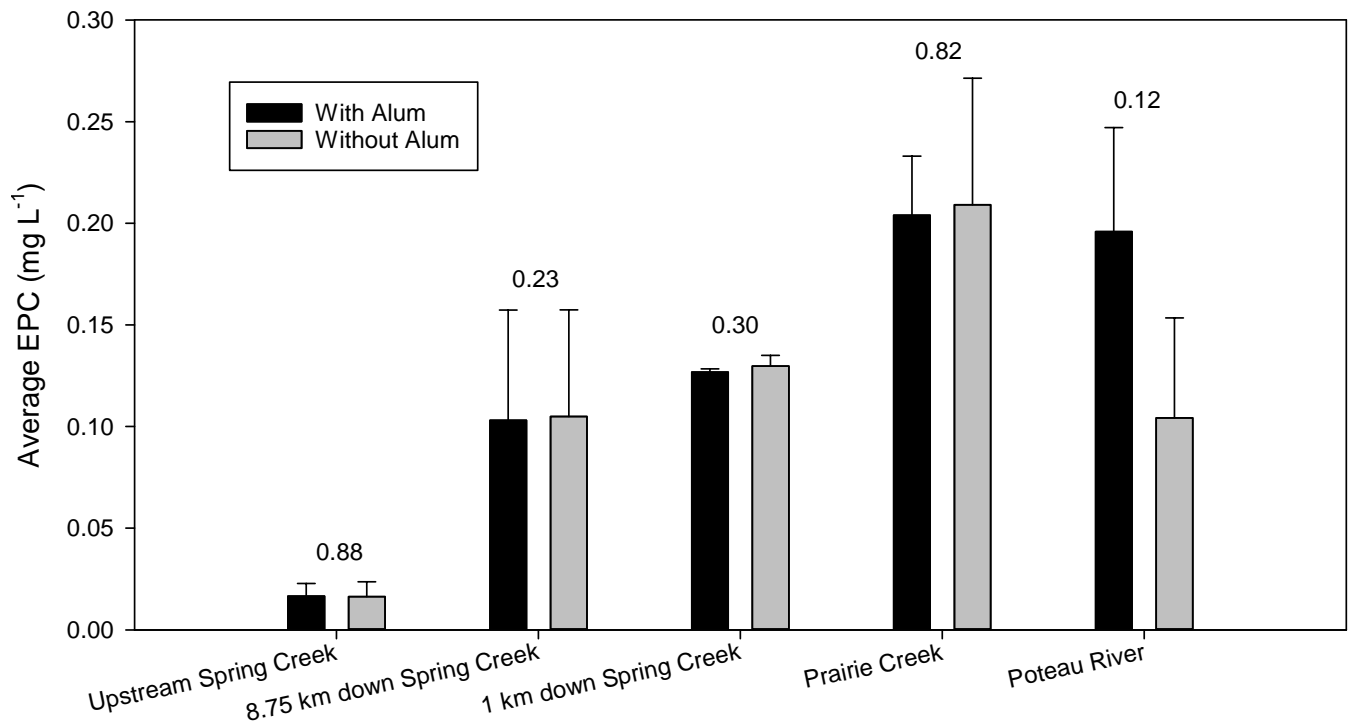


Figure 2- Average (plus or minus standard deviation) EPC estimates across each site with and without reduced ambient P concentrations (i.e. with and without alum treatment); p-values of the paired t-test between estimation methods are shown above each site.

Discussion

Optimal alum treatment concentrations for P removal were determined to be 5, 10, and 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$, dominantly based on the removal of ambient SRP (mg L^{-1}) and the average pH for each treatment, since most impacts on water chemistry were not significant ($p > 0.05$). The objective was to achieve a range of SRP concentrations below ambient for each stream, which was achieved using these alum concentrations. If alum treatments are to be used in EPC experiments, these results (Figure 1) would allow for a user to determine optional alum dosages, based on ambient P concentrations in streams of interest. However, as shown in the alum treatment experiment, alum concentrations above 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ began to lower the pH, which could alter the sorption properties of P and cause inaccurate estimations of EPC. Similar decreases in pH with alum treatments have been observed in lake and reservoir management (Barko 1987; Berkowitz et al. 2005), where pH decreases quickly after alum application, but returns to initial conditions after a couple of weeks. Often times for lakes and reservoirs, the maximum allowable dose of alum is that which does not decrease the pH below 6.0 and can often be applied with a pH buffer (i.e. sodium aluminate) to increase dissolved Al and to protect other biogeochemical processes (Kennedy and Cook, 1982).

Residual Al concentrations were observed after adding alum, which often occurs after alum treatments in lakes and reservoirs (Barko, 1987). Concentrations of Al peaked at alum treatment concentrations of 5 or 10 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ across each site. At the smaller alum treatment concentrations, the aluminum hydroxide floc may not be fully formed. Visually, flocs were easily noticed at the alum treatment concentration of 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$, slightly at the 10 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ concentration, and not at all at the 5 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ concentration. This suggests the Al was still dissolved in solution at lower alum dosages (instead of forming a floc), which could have led to measurable Al concentrations in the overlying water.

Concentrations of SO_4 increased with increasing alum treatments, as expected. Aluminum hydroxides form as alum is added to water, and P co-precipitates and/or absorbs to these molecules, leaving sulfate suspended in solution. The decreases in Zn and Fe could be attributed to the diffuse double layer theory. Phosphates in solution bind to the aluminum hydroxide floc, creating a negative charge and attracting positively charged ions (Breeuwsma and Lyklema, 1973; Trefalt et al., 2016). All other trace metal concentrations did not show a significant difference between alum treatments ($p>0.05$) concluding the impacts on water chemistry were slim.

It would be expected for sediments to desorb more P as the initial P in the water decreases (with increasing alum treatment). However, at the Poteau River, sediment desorption did not follow this pattern. The greatest desorption occurred at the lowest alum treatment which had initial P concentrations of 0.11-0.12 mg L^{-1} at each transect (compared to the greatest alum treatment, which resulted in initial P concentrations of 0.02 mg L^{-1}). Therefore, the alum treatments removed P concentrations as expected, but desorption occurred oppositely. This could be due to sediments inadequately being filtered from the supernatant following the EPC experiment. If sediment-bound P was not adequately filtered, greater P concentrations could be measured, resulting in higher desorption values. If the lowest alum treatments are removed, differences in estimated EPC values with and without alum decrease from 61% to 28%. However, whether these points are included or not, EPC is not significantly different with and without alum treatments ($p>0.05$).

Conclusions

Including desorption of P from the sediments did not significantly alter the estimation of EPC across all sites (Figure 2). Traditional methods of calculating EPC values by extrapolating past the known data set of P sorption from sediments are acceptable, and both time and money can be saved from not including alum treatments in EPC calculations. However, the inclusion of the x-axis in the data range (i.e.

desorption to adsorption) likely reduces the uncertainty in EPC estimation based on the linear regressions (Simpson et al., 2019). With the increasing interest in EPC values being included in watershed models such as the Soil & Water Assessment Tool, it is vital to have accurate estimations and to conserve time and funds (Mittelstet et al., 2017).

This study evaluated the influence that reducing dissolved P concentrations with the inclusion of alum treatments has on current EPC estimation methods and made the following observations.

- Optimal alum dosages to be between 5 and 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$ to provide a range of P removal for the EPC experiments.
- Above 25 mg- $\text{Al}_2(\text{SO}_4)_3 \text{ L}^{-1}$, stream water pH began to decrease. The only other notable changes to water chemistry after alum treatments were increases in sulfate (as expected) and residual Al concentrations in some treatments.
- EPC estimations were not significantly different between traditional calculation methods and the inclusion of P desorption data points.

These results indicate current methods for EPC estimations are acceptable, and spending extra time and money in simulating desorption of P from the sediments is not necessary. However, it may be necessary to test different stream systems to apply this conclusion universally.

Acknowledgements

This research and writing benefited from the guidance and assistance of Ms. Abbie Lasater.

We'd also like to thank Dr. Brad Austin, Brina Smith, Jennifer Purtle, Keith Trost, and all the REU program staff and lecturers. This work was supported in part by the Arkansas Water Resources Center through the USGS Water Resources Research Institute Program, the NSF Ecosystems REU Project (NSF DBI 165987), the USDA National Institute of Food and Agriculture, Hatch Project 2260, and the University of Arkansas Division of Agriculture.

References

- American Public Health Association (APHA). 1998. Standard methods for the examination of water and wastewater. 20th ed. American Public Health Association, American Water Works Association, and Water Environmental Federation, Washington DC.
- Arkansas Natural Resources Commission (ANRC). 2018-2023. Nonpoint source pollution management plan. ANRC, Little Rock, AR.
- Berkowitz, J., M.A. Anderson, and R.C. Graham. 2005. Laboratory investigation of aluminum solubility and solid-phase properties following alum treatment of lake waters. *Water Res.* 39:3918–3928. doi:10.1016/j.watres.2005.06.025
- Breeuwsma, A., and J. Lyklema. 1973. Physical and chemical adsorption of ions in the electrical double layer on hematite (α -Fe₂O₃). *J. Colloid Interface Sci.* 43:437–448. doi:10.1016/0021-9797(73)90389-5
- Erickson, A.L., S.M. Williamson, and B.E. Haggard. 2004. Method analysis of laboratory measures of stream sediment and water phosphorus equilibrium. *Discovery* 5:10–15.
- Froelich, P.N. 1988. Kinetic control of dissolved phosphate in natural rivers and estuaries: A primer on the phosphate buffer mechanism. *Limnol. Oceanogr.* 33(4, part 2):649–668.
- Gassman, P.W., M.R. Reyes, C.H. Green, and J.G. Arnold. 2007. e Soil and Water Assessment Tool: Historical development, applications, and future research directions. *Trans. ASABE* 50:1211–1250. doi:10.13031/2013.23637
- Haggard, B.E., S.A. Ekka, M.D. Matlock, and I. Chaubey. 2004. Phosphate equilibrium between stream sediments and water: Potential effect of chemical amendments. *Trans. ASAE* 47:1113–1118.
- Haggard, B.E., D.R. Smith, and K.R. Brye. 2007. Variations in stream water and sediment phosphorus among select ozark catchments. *J. Environ. Qual.* 36:1725–1734. doi:10.2134/jeq2006.0517

Huser, B., P. Brezonik, and R. Newman. 2011. Effects of alum treatment on water quality and sediment in the Minneapolis Chain of Lakes, Minnesota, USA. *Lake Reservoir Manage.* 27:220–228. doi:10.1080/07438141.2011.601400

Kennedy, R.H., J.W. Barko, W.F. James, W.D. Taylor, and G.L. Godshalk. 1987. Aluminum sulfate treatment of a eutrophic reservoir: Rationale, application methods, and preliminary results. *Lake Reservoir Manage.* 3:85–90. doi:10.1080/07438148709354763

Kennedy, H.R., and D.G. Cook. 1982. Control of lake phosphorus with aluminum sulfate: Dose determination and application techniques. *Am. Water Resour. Assoc.* 18:389–395. doi:10.1111/j.1752-1688.1982.tb00005.x

Klotz, R.L. 1985. Factors controlling phosphorus limitation in stream sediments. *Limnol. Oceanogr.* 30:543–553. doi:10.4319/lo.1985.30.3.0543

Landner, L. 1970. Lake restoration: Trials with direct precipitation of P in polluted lakes. *Swedish Water Air Pollut. Res. Lab., Stockholm.*

McDowell, R.W., and A.N. Sharpley. 2003. Uptake and release of phosphorus from overland flow in a stream environment. *J. Environ. Qual.* 32:937–948. doi:10.2134/jeq2003.9370

Mittelstet, A.R., D.E. Storm, and G.A. Fox. 2017. Testing of the modified stream-bank erosion and instream phosphorus routines for the SWAT model. *J. Am. Water Resour. Assoc.* 53:101–114. doi:10.1111/1752-1688.12485

Mulholland, P.J., and J.R. Webster. 2010. Nutrient dynamics in streams and the role of *J-NABS*. *J. North Am. Benthol. Soc.* 29:100–117. doi:10.1899/08-035.1

Simpson, Z.P., R.W. McDowell, and L.M. Condon. 2019. The error in stream sediment phosphorus fractionation and sorption properties effected by drying pretreatments. *J. Soils Sediments* 19:1587–1597. doi:10.1007/s11368-018-2180-3

Taylor, A.W., and H.M. Kunishi. 1971. Phosphate equilibria on stream sediment and soil in a watershed draining an agricultural region. *Soil (Gottingen)* 19:827–831.

Trefalt, G., S.H. Behrens, and M. Borkovec. 2016. Charge regulation in the electrical double layer: Ion adsorption and surface interactions. *Langmuir* 32:380–400. doi:10.1021/acs.langmuir.5b03611

US Geological Survey. 2011. NLCD 2011 land cover. USGS, Reston, VA.

White, M.J., D.E. Storm, A. Mittelstet, P.R. Busteed, B.E. Haggard, and C. Rossi. 2014. Development and testing of an in-stream phosphorus cycling model for the Soil and Water Assessment Tool. *J. Environ. Qual.* 43:215–223. doi:10.2134/jeq2011.0348

Withers, P.J.A., and H.P. Jarvie. 2008. Delivery and cycling of phosphorus in rivers: A review. *Sci. Total Environ.* 400:379–395. doi:10.1016/j.scitotenv.2008.08.002

Woods, A.J., T.L. Foti, S.S. Chapman, J.M. Omernik, J.A. Wise, E.O. Murray, et al. 2004. Ecoregions of Arkansas. USGS, Reston, VA.