

11-1-2003

Water Quality Sampling, Analysis and Annual Load Determinations for TSS, Nitrogen and Phosphorus at the Washington County Road 76 Bridge on Ballard Creek

Marc A. Nelson
University of Arkansas, Fayetteville

Ron Redman
Arkansas Soil and Water Conservation Commission

L. Wade Cash
University of Arkansas, Fayetteville

G. Keith Trost
University of Arkansas, Fayetteville

Follow this and additional works at: <https://scholarworks.uark.edu/awrctr>



Part of the [Fresh Water Studies Commons](#), and the [Water Resource Management Commons](#)

Citation

Nelson, Marc A.; Redman, Ron; Cash, L. Wade; and Trost, G. Keith. 2003. Water Quality Sampling, Analysis and Annual Load Determinations for TSS, Nitrogen and Phosphorus at the Washington County Road 76 Bridge on Ballard Creek. Arkansas Water Resources Center, Fayetteville, AR. MSC309. 7
<https://scholarworks.uark.edu/awrctr/111>

This Technical Report is brought to you for free and open access by the Arkansas Water Resources Center at ScholarWorks@UARK. It has been accepted for inclusion in Technical Reports by an authorized administrator of ScholarWorks@UARK. For more information, please contact scholar@uark.edu.



Arkansas Water Resources Center

WATER QUALITY SAMPLING, ANALYSIS AND ANNUAL LOAD DETERMINATIONS FOR TSS, NITROGEN AND PHOSPHORUS AT THE WASHINGTON COUNTY ROAD 76 BRIDGE ON BALLARD CREEK

Submitted to the
Arkansas Soil and Water Conservation Commission

By

Marc A. Nelson
Arkansas Water Resources Center

Ron Redman
Arkansas Soil and Water Conservation Commission

L. Wade Cash
Arkansas Water Resources Center

G. Keith Trost
Arkansas Water Resources Center

November 2003

Publication No. MSC-309

Arkansas Water Resources Center
112 Ozark Hall
University of Arkansas
Fayetteville, Arkansas 72701

WATER QUALITY SAMPLING, ANALYSIS AND ANNUAL LOAD
DETERMINATIONS FOR TSS, NITROGEN AND PHOSPHORUS AT
THE WASHINGTON COUNTY ROAD 76 BRIDGE
ON BALLARD CREEK

Submitted to:

Arkansas Soil and Water Conservation Commission

By:

Marc Nelson
Arkansas Water Resources Water Quality Lab
Arkansas Water Resources Center
University of Arkansas
Fayetteville, Arkansas 72701

Ron Redman
Arkansas Soil and Water Conservation Commission
Little Rock, Arkansas 72201

L. Wade Cash
And
G. Keith Trost
Arkansas Water Resources Water Quality Lab
Arkansas Water Resources Center
University of Arkansas
Fayetteville, Arkansas 72701

November 2003

INTRODUCTION

The Illinois River Basin has experienced water quality impairment from non-point source pollution for many years. This fact was well documented in the State of Arkansas' Water Quality Assessment report, the Soil Conservation Service River Basin Study, and several University of Arkansas studies. Thirty-seven sub-watersheds have been identified by the SCS in the Arkansas portion of the Illinois River basin. In the Arkansas portion of the Basin, the Illinois River, Evansville Creek, Baron Fork, Cincinnati Creek, Muddy Fork, Moores Creek, Clear Creek, Osage Creek and Flint Creek were all classified as not supporting their designated use as primary contact recreation streams. The identified causes of the impairment were: sediment, bacteria and nutrients.

In 1997, the University of Arkansas completed a project that estimated the phosphorus loading from each of the thirty-seven sub-watersheds. This project also prioritized watersheds for implementation work based on phosphorus loads, nitrogen loads and total suspended solids loads per unit area. The thirty-seven sub-watersheds were grouped into Low (16), Medium (10) and High (11) categories based on phosphorus loadings. If all the sub-watersheds above the median value for on phosphorus loading in the Illinois River basin were brought down to the current median value for phosphorus loading, this reduction would result in the agreed to 40% reduction of phosphorus at the state line.

The selection of a sub-watershed for targeted intensive voluntary BMP implementation was based on the following criteria: a) the sub-watershed had to be above the current median value for phosphorus loading, b) there would be no sewage treatment plant in the sub-watershed, and c) land user interest. The Upper Ballard Creek watershed met all these requirements. The watershed covers 7106.24 hectares. The creek is currently in the High category with a unit area loading of 1.75 kg. per hectare per year. The median value for the thirty-seven watersheds is 0.73 kg. per hectare per year.

HISTORY

A water quality sampling station was installed at the Washington County Road 76 Bridge over Ballard Creek just before the creek leaves the state of Arkansas and enters into Oklahoma. The station was initially funded under an ASWCC 319 h grant FY99-100 to collect two storm event samples, four base flow grab samples and four periphyton growth samples per year. During the period of time from July 1, 2000 to September, 2001 the sampling station was being installed and no stage or water quality information was collected. Quarterly water quality and periphyton samples were collected in the last quarter of 2001 and during the first two quarters of 2002. However, due to datalogger failure, no stage information was collected until February 15, 2002.

Beginning July 1, 2002 the funding was supplemented at this site so that all storms are sampled; grab samples and periphyton samples are collected and analyzed every two weeks.

METHODS

The automatic storm water monitoring station consisted of a Sigma 900 max sampler with 24 1 liter bottles controlled by a Campbell Scientific (CSI) CR10X programmable datalogger. The sampler and data logger were enclosed in a steel gauge house located next to the Washington County Road 76 Bridge over Ballard Creek. Water stage was measured using a Campbell Scientific ultrasonic distance sensor mounted underneath the bridge. A rating curve was developed by the USGS at the site to convert stage to discharge. In addition, a Canadian Forest Product turbidity sensor was located under the bridge and its data was stored along with stage and discharge measurements on the CSI datalogger. The datalogger was programmed to trigger the sampler using either flow or time based intervals.

Initially the sampler was operated in a discrete mode taking samples at thirty-minute intervals for the first twenty-four samples and sixty-minute intervals for the next twenty-four samples. The sampler was set to

begin taking samples when the stage rose to ten percent over the prior base flow. Trigger levels were evaluated and modified based on load calculation optimization techniques. Discrete samples were collected when all twenty-four bottles were filled or within forty-eight hours after the first sample. Grab samples were taken often enough to have three samples between each storm. The sampler was operated using this protocol until three storms were adequately sampled. The results from this initial sampling phase were used to determine the sampling start (trigger) and frequency for flow-weighted composite sampling. In addition, the results were used to develop rating curves to predict pollutant concentrations as a function of discharge in order to calculate loads for inadequately sampled storm events.

After the initial phase, the sampler was reconfigured to take flow-weighted composite samples. The sampler began sampling after the stage exceeded a set trigger level of two feet. It took a discrete sample after a fixed volume of water had passed. The volume of water used for the flow weighted composite samples, i.e. sampling frequency, was 1 million cubic feet, as determined from the initial sampling phase. The discrete samples were composited by combining equal volumes of each into a single sample for analysis. Discrete samples were collected for compositing when all twenty-four bottles were filled or within forty-eight hours after the first sample. Storms were sampled in this manner for the period when the river stage was above the trigger level. Grab samples were taken every two weeks after the initial sampling phase. All samples were collected by AWRC Field Services Personnel and transported to the AWRC Water Quality Laboratory for analysis. All samples were analyzed for nitrate-nitrogen, ammonia-nitrogen, total Kjeldahl nitrogen, total phosphorus, dissolved reactive phosphorus and total suspended solids.

In addition to chemical water quality sampling, periphyton sampling was done to assess the productivity of the stream. Periphyton sampling for determination of primary productivity followed method number 10300 in Standard Methods 20th edition. Standard microscope slides were used as a substrate for periphyton growth. Slides were placed in holders designed to hold eight pairs of slides vertically, perpendicular to the flow, near the surface of the stream. Slide holders were placed in the stream at two sites near the automatic water sampling station. The two sites were chosen to represent the predominate morphological features of this order stream: riffles and shallow pools. The slides were placed at the sites every two weeks during the year. Slides were left in the stream for two weeks and then retrieved and used to determine ash-free biomass weight and Chlorophyll A concentration. Primary productivity was determined from ash-free weight and Autotrophic Index was determined from ash-free weight divided by Chlorophyll A concentration.

RESULTS

Quarterly sampling began in November 2001 and continued through the end of the fiscal year in June 2002. Bi-weekly grab sampling and automated storm sampling commenced in July 2002 and continued through the end of 2002. During the year, 40 individual samples were collected and analyzed. They include 12 base-flow grab samples, 1 composite storm sample, 20 periphyton samples, 2 field blanks and 2 field duplicates. The stage for 2002 as well as the concentration results from the samples is summarized in Figure 1 and Table 1.

Figure 1. 2002 stage, nutrients and TSS.

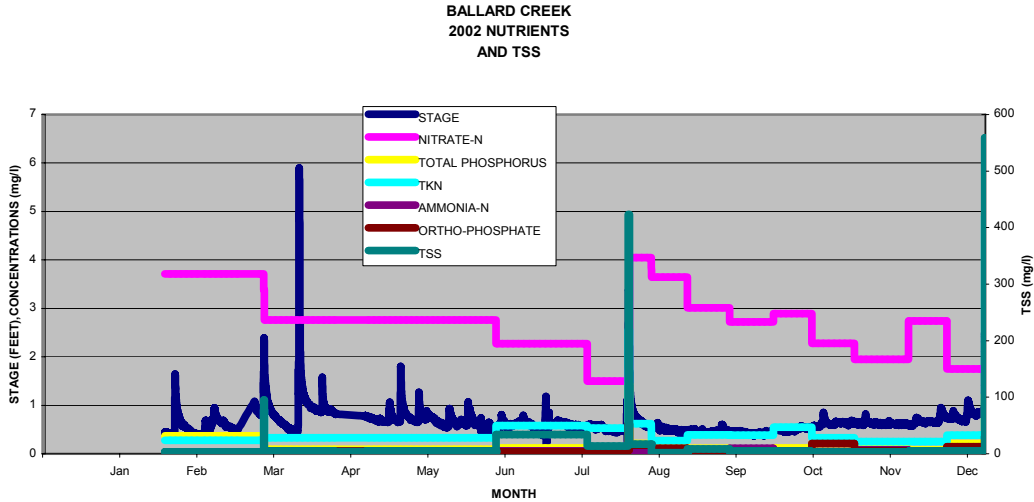


Table 1. 2002 partial year loads and mean concentrations.

parameter	Loads (kg)	Mean Concentrations (mg/l)
Nitrate-N	85,664	2.71
Total Phosphorus	5,409	0.17
Ammonia-N	1,594	0.05
TKN	13,392	0.42
Phosphate-P	2,425	0.08
TSS	518,785	16.42

The loads and mean concentrations can be segregated into storm-flow and base-flow using the trigger level as an arbitrary distinction between flow regimes. Using the trigger level value of 1 foot, the segregated loads and mean concentrations for 2002 are shown in Table 2.

Table 2. Storm-flow and Base-flow loads and Mean Concentrations Partial Year 2002.

	Storm Loads (kg)	Base Loads (kg)	Storm Concentrations (mg/l)	Base Concentrations (mg/l)
VOLUME (M3)	4,748,913	26,853,439		
NO ₃ -N	13,491	72,195	2.84	2.69
T-P	1,539	3,871	0.32	0.14
NH ₄	222	1,373	0.05	0.05
TKN	3,259	10,136	0.69	0.38
PO ₄	560	1,866	0.12	0.07
TSS	299,164	219,650	63.00	8.18

There were no significant storm events captured with discreet samples during 2002 and thus no stage / concentration regressions were performed.

Periphyton samples were collected nine separate times in 2002. Samples were collected by retrieving glass slides that had been placed two weeks previously at a pool and a riffle just upstream from the sampling station. The slides were analyzed for Chlorophyll A and ash-free dry weight. Primary Productivity was determined from the average accumulated mass on each set of nine slides as measured by ash-free dry

weight. Autotrophic Index was determined by dividing ash-free dry weight by the average Chlorophyll A determined from each set of nine slides. The results are summarized in figures 3 and 4.

Figure 3 Primary productivity.


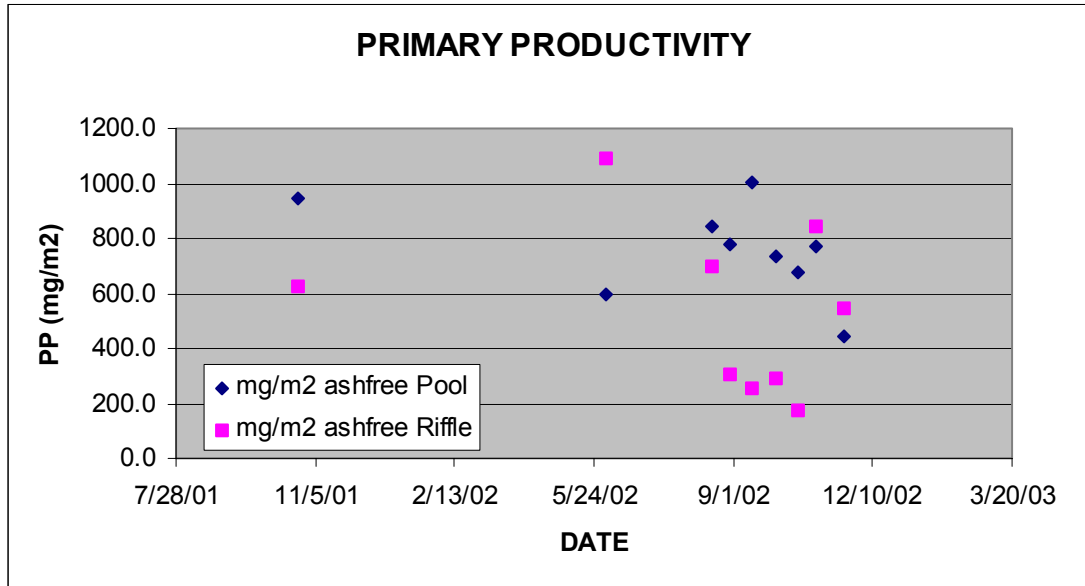


Figure 4 Autotrophic Index

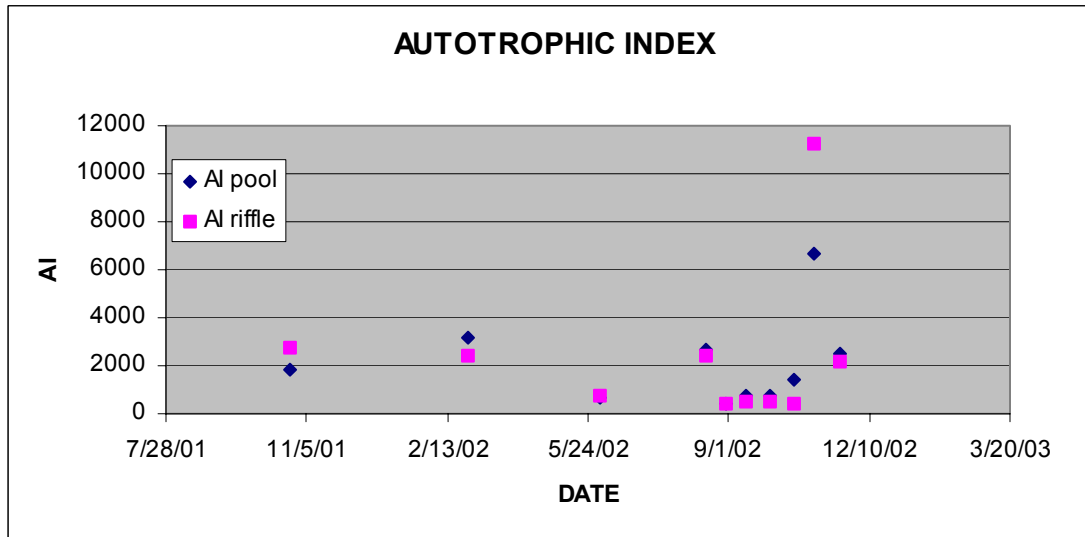

DISCUSSION

The results for this Ballard Creek site during 2002 can be compared to results from other Northwest Arkansas watersheds that were investigated using the same sampling and load calculation protocols. Table 3 lists the results for TSS, phosphorus and discharge from 6 other watersheds. TSS and phosphorus are shown as total annual loads per acre, annual storm loads per acre, and annual mean base-flow concentrations. The total loads indicate the mass of TSS or P that are being transported to a receiving water body. Storm loads per acre may be used to represent relative impacts from non-point sources. The base-flow concentrations show relative levels of TSS and P that are impacting in-stream biological activity during most of the year. These are the values that are of greatest interest for determining impacts to in-stream macro invertebrate habitat and nuisance algae production. These values do not necessarily represent actual

base and storm flows, but rather represent comparable values for determining the relative impacts in similar watersheds.

The Ballard creek watershed above the sampling station is 15,600 acres in size. The total TSS and storm TSS loads per acre would be 77 and 42 #/ acre. The total T-P and storm T-P loads would be 0.76 and 0.21 #/acre. These numbers are considerably lower than the other watersheds, but are not comparable since the Ballard Creek data represents only the partial year with few storm events. The baseflow concentration data is more comparable. The base TSS concentration of 8 mg/l is the lowest of any of the watersheds but the base P concentration at 0.14 mg/l is higher than Moores Creek a similar watershed and the only one compared that doesn't have a point source discharge.

Table 3. Results from six other Northwest Arkansas Watersheds.

	West Fork at 195	White River at Wyman	Kings River at 143	Osage Creek at 112	Illinois River at 59	Moores Creek
ACRES	65,920	256,000	337,280	22,208	368,000	2,200
YEARS of data	1	1	4	1	6	2
tss load (#/acre)	839	644	351	466	340	413
tss storm load (#/acre)	570	475	320	182	312	382
tss conc. base (mg/l)	170	93	27	39	20	12
p load (#/acre)	1.30	1.38	0.89	1.16	1.38	1.44
p storm load (#/acre)	0.91	1.00	0.62	0.70	0.98	1.16
p base conc. (mg/l)	0.25	0.21	0.24	0.28	0.26	0.10
DISCHARGE (ft3)	3.5E+09	1.5E+10	1.5E+10	1.2E+09	1.9E+10	8.6E+07
DISCHARGE/AC (ft3/acre)	53,419	57,847	44,161	55,475	52,625	38,987

REFERENCES

- Nelson, M.A., T.S. Soerens, J. Spooner "Results of Investigation of Optimum Sample Interval for Determining Storm Water Pollutant Loads", Proceedings of the Water Environment Federation WEFTEK Conference, New Orleans, LA, 1999.
- Nelson, M.A., T.S. Soerens "1997 Pollutant Loads At. Arkansas Highway 59 Bridge" Presented at Arkansas-Oklahoma Arkansas River Compact Commission Meeting, September 1998.
- Nelson, M.A., T.S. Soerens "1998 Pollutant Loads At. Arkansas Highway 59 Bridge" Arkansas Water Resources Center Publication, 1999.
- Nelson, M.A., T.S. Soerens "1999 Pollutant Loads At. Arkansas Highway 59 Bridge" Arkansas Water Resources Center Publication, 2000.
- Nelson, M.A., T.S. Soerens "2000 Pollutant Loads At. Arkansas Highway 59 Bridge" Arkansas Water Resources Center Publication, 2001.
- Nelson, M.A., T.S. Soerens "2001 Pollutant Loads At. Arkansas Highway 59 Bridge" Arkansas Water Resources Center Publication, 2002.
- Nelson, M.A., T.S. Soerens, J. Spooner " Preliminary Results of Investigation of Optimum Sample Interval for Determining Storm Water Pollutant Loads", Presented at ASCE Watershed Management Conference, Memphis, TN, 1998.
- Nelson, M.A., T.S. Soerens and D.G. Parker "Phosphorus Transport in the Illinois River: Preliminary Results of Intensive Sampling" Proceedings of the Arkansas Water Resource Center Annual Conference, 1998.
- Nelson, M.A., T.S. Soerens, J. Spooner "Investigation of Optimum Sample Number and Timing for Determining Storm Water Pollutant Loads Year [1998 and 1999]", Arkansas Water Resources Center Annual Report 1999-2000, August 2001.
- Nelson, M.A., L.W. Cash "Water Quality Sampling, Analysis And Annual Load Determinations For TSS, Nitrogen And Phosphorus At The Wyman Road Bridge On The White River, Final Report" Arkansas Water Resources Center Publication, 2003.
- Nelson, M.A., L.W. Cash "Illinois River 2002 Pollutant Loads at the Arkansas Highway 59 Bridge" Arkansas Water Resources Center Publication, 2003.
- Nelson, M.A., L.W. Cash "Water Quality Sampling, Analysis And Annual Load Determinations For TSS, Nitrogen And Phosphorus At The 143 Bridge On The Kings River, 2002 Annual Report" Arkansas Water Resources Center Publication, 2003.
- Nelson, M.A., S. L. Diffin "Water Quality Sampling, Analysis And Annual Load Determinations For TSS, Nitrogen And Phosphorus At The 112 Bridge On The Osage Creek, Final Report" Arkansas Water Resources Center Publication, 2003.
- Nelson, M.A., L.W. Cash "Water Quality Sampling, Analysis And Annual Load Determinations For TSS, Nitrogen And Phosphorus On Moores Creek, 2002 Annual Report" Arkansas Water Resources Center Publication, 2003.
- Parker, D. G, R. D. Williams, and H. D. Scott. 1996. Watershed Prioritization Publication No MSC-204 Arkansas Water Resources Center. University of Arkansas. Fayetteville, Arkansas.
- Parker, D.G., R. Williams and E. Teague "Illinois River Water Quality Automatic Sampler Installation" Arkansas Water Resource Center Miscellaneous Publication 0227, 1997.